

# DETECTION METHOD FOR TRANSMITTER IDENTIFICATION INFORMATION IN DAB STREAM

**Publication number:** JP11154919 (A)

**Publication date:** 1999-06-08

**Inventor(s):** SCHAEFER WOLFGANG; GRAESSLE JUERGEN;  
ZUMKELLER MARKUS +

**Applicant(s):** SONY INT EUROP GMBH +

**Classification:**

- **international:** **H04B1/16; H04H60/50; H04J11/00; H04H60/51; H04B1/16; H04J11/00;** (IPC1-7): H04H1/00; H04B1/16

- **European:** H04H60/50

**Application number:** JP19980240530 19980826

**Priority number(s):** EP19970115649 19970909

**Also published as:**

JP3954729 (B2)

EP0902563 (A1)

EP0902563 (B1)

US6134267 (A)

DE69735152 (T2)

more >>

## Abstract of JP 11154919 (A)

**PROBLEM TO BE SOLVED:** To obtain a reliable result, even when a signal to noise ratio is low, in the detection method of transmitter identification information in a null symbol of a DAB stream.

**SOLUTION:** The detection method of transmitter identification information, i.e., TII, in a DAB stream includes the following four steps: to obtain a spectrum of a null symbol demodulated by applying differential demodulation to a pair of TII included in a spectrum for each 2nd null symbol of a received DAB stream, to correct a phase of a carrier of the spectrum of the demodulated null symbol by a TFR phase reference code, to decide a threshold value, and to discriminate whether or not the carrier has been set by comparing a level of the carrier with a threshold level decided in a preceding step.

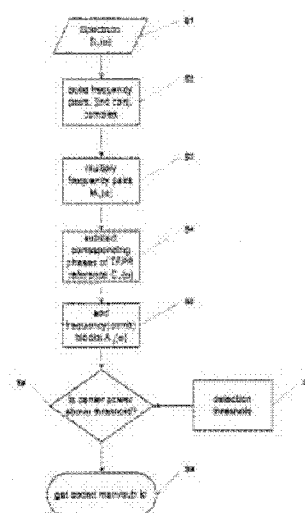


Fig. 1

Data supplied from the **espacenet** database — Worldwide